

N-Series Superior Night Vision 3 Megapixel Bullet Network Camera

OB-302Np Series

HDTV 1080p/720p • 3M/2M Resolution Supported




- N-Series Sony Exmor 3M Outdoor Bullet Camera
- Brickcom WDR Enhancement® Technology inside
- **FocusEasy™** to Ease the Focus Adjustment via the Buzzer for notification (*)
- HDTV Quality (Full HD 1080p @ 30fps Streaming)
- **Intelligent Multi-Profile Sensor Management®** for Different Environments
- Removable IR-cut Filter /Auto Light Sensor for Day and Night
- IP67 Outdoor Enclosure Built-in Fan (-40°C ~ 60°C) and Heater
- Built-in IR Illuminators, effective up to 25 Meters
- Two-way Audio/Built-in Micro SD/SDHC Memory Card Slot for Local Storage
- 1 DI/DO for External Alarm and Sensor Device/ TV out Connector Supported
- PoE(802.3at) / PoE(802.3af)/ DC12V (*)/ AC24V (*) Supported
- Smart IR to adjust the IR LED light across the entire area to get a well illuminated image(*)
(*V5 only)

Photo Indication & Dimension Diagram




ONVIF

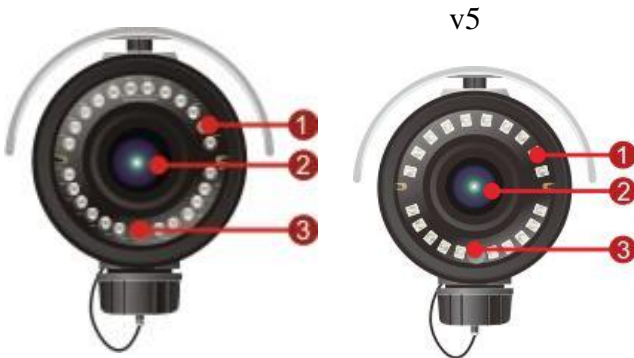

- 1 IR LED
- 2 LENS
- 3 Light Sensor
- 4 RJ45 Connector 1 (For Ethernet, 802.3at PoE and 802.3af PoE)
- 5 DC12V / AC24V(*) Connector
- 6 RJ45 Connector 2 (For Audio in/out, RS485, DIDO)

*GOB-300Np *WOB-300Np
GOB-300NpV5 WOB-300NpV5

(*)- V5 only

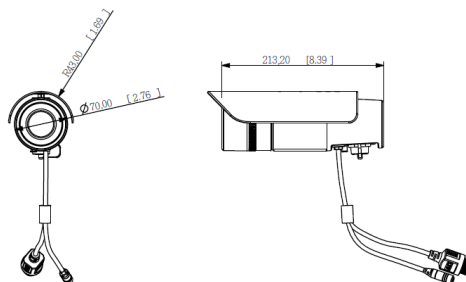

Camera		Events and Alarm Management	
Models	OB-302Np/OB-302Np V5: 3M, Vari-Focal Lens	Events	Motion Detection/ Schedule/ Audio Detection/ Digital Input/ Temperature Alarm(*) * V5 Only
Hardware System	CPU: 533 MHz Flash: 32M RAM: 256M DDR	Alarm	Stream/Snapshot to FTP/Email/Samba/SD-Card HTTP/Email Notification/ Digital Output
Image Sensor	Sensor Type : 1/2.8" 3M Sony Exmor Megapixel sensor Sensor Resolution : 2048 x 1536 pixel	Audio	
Lens	Lens Type: Board Lens IRIS: F1.4 OB-302Np V5: Focal Length: 3mm~10.5mm View Angle: (H°/V°/D°) (H)98°~32°(V)/72°~24°/(D) 128°~40° OB-302Np: Focal Length: 3.3mm~10.5mm View Angle: (H°/V°/D°) (H)84°~31°(V)/62°~24°/(D)110°~38°	Audio Streaming	2-way Audio Support
Local Storage	Built-in Micro SD/SDHC/SDXC Max.64G Memory Card Slot	Audio Compression	G.711, AMR (8 kHz, Mono, PCM)
Day & Night ICR	Triggered by Light sensor, Scheduling, Digital Input	Audio Input/ Output	Line input (Unbalanced, 1.4 Vp-p, 1 Vrms) / Line output
Minimum Illumination	OB-302Np: 0 Lux (IR ON, B/W) 0.002 Lux (IR OFF, B/W) 0.003 Lux(F1.4,Color) OB-302Np V5: 0 Lux (IR ON, B/W) 0.001 Lux (IR OFF, B/W) 0.002 Lux(F1.4,Color)	General	
IR Illuminators	Built –In IR Illuminators, OB-302Np: effective up to 15 meters IR LED: 24pcs OB-302Np V5: effective up to 25 meters IR LED:20pcs	Communication	Ethernet : one 10/100Mbps RJ-45 Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, Samba, PPPoE, UPnP, RTP, RTSP, RTCP, IPV6
Video		Power Input	DC12V 1A / 802.3af PoE 802.3at PoE/ DC48V 0.8A* AC24V* * V5 Only
Compression Streaming	H.264 / MPEG4 / MJPEG Simultaneous multiple streams	Power Input/ Temperature/ Environment	Operating Temperature: DC12V 1A / 802.3af PoE: -20°C ~ 60°C (-4°F ~140°F) 802.3at PoE/ DC48V 0.8A: (build in fan and heater): -40°C ~ 60°C (-40°F ~140°F) Operating Humidity: 10% ~ 80%
Video Setting	Multi-Profile Image Management: Day/ Night/ Sunset/ User 1/ User 2 Auto Exposure Control/Gain/ White Balance Control Manual Exposure Control: 1/10000~1/5s Manual Gain Control: 1X ~ 15X	Max. Power Consumption	OB-302Np & OB-302Np V5 7.6 Watts (PoE 802.3af, IR on) 7.8 Watts (PoE 802.3at, IR on) 18.2 Watts (PoE 802.3at, IR&Heater&Fan on)
S/N Ratio	Above 50dB	Dimension	70(D) * 166(H) mm
Image Resolution	3M : 2048x1536 @ 20fps 2M (Full HD): 1920x1080 @ 30fps 1M (HDTV): 1280x720 @ 30fps	Weight	OB-302Np & OB-302Np V5 Net: 1100 g/2.43lb
		Housing	Weather-proof (IP67)
		Certification	FCC, CE
		Viewing System Requirements	OS: Microsoft Windows 7/Vista/XP/2000 Browser: Mozilla Firefox, Internet Explorer 6/7 or above, Safari, Google Chrome Cell Phone: 3GPP player Real Player: 10.5 or above Quick Time: 6.6 or above VLC
		Warranty	Limited 2-year warranty

OB-300N Series	OB-302Np	OB-302Np V5
Lens Type	Vari-Focal-Lens	Vari-Focal-Lens (FocusEasy™)
Wireless (11a/b/g/n dual band WiFi)	-	-
3G/ 4G(WiMAX/LTE)	-	-
Operating Temperature; Max. Power Consumption	-20°C ~ 60°C; 8 Watts (DC12V 1A / 802.3af) -40°C ~ 60°C;20 Watts(DC48V 0.8A/PoE 802.3at)	-20°C ~ 60°C; 8 Watts (DC12V 1A / 802.3af) -40°C ~ 60°C;20 Watts(DC48V 0.8A/PoE 802.3at)

Work Best With

Camera Accessories Options



CI-812
Camera Bracket



GEM04-222008A
Wi-Fi Dual Band Omni Antenna



GEM07-15072A
3G Antenna

Network Equipment Options



GEM04-222060
Wi-Fi Dual Band Antenna



POE30U
High Power PoE Injector