

N6011 Bullet Network Camera



5 Megapixel / H.264 / 1080P Real-Time / D-WDR / Vari-Focal / Auto-IRIS

- 5 Megapixel 1/3" CMOS Sensor in High Resolution
- H.264/MJPEG Dual Codec & Streaming simultaneously
- Auto-IRIS
- Vari-Focal Lens 3-10mm F1.3
- Up to QXGA (2560x1920@15fps) / 1080P(1920x1080@30fps)
- Digital I/O for External Sensor and Alarm
- Mechanical ICR
- Digital Powerful WDR
- Built-in IR Illuminator
- 3D Noise Reduction
- 2 Way Audio Supported
- Intelligent Video Analytics
- PoE Power Over Ethernet IEEE802.3af (Option)
- Micro SD Card Supported (SDHC up to 32GB)




Specifications

<div data-bbox="121 622 734 952"> <p>Camera</p> <p>Sensor: 5 Megapixel 1/3" CMOS sensor</p> <p>Scan Method: Progressive</p> <p>Lens: Vari-Focal Lens 3-10mm F1.3</p> <p>Number of Effective Pixel (H*V): 2560x1920</p> <p>Minimum Illumination: 0.1Lux (F1.6, AGC max.)0Lux (IR On)</p> <p>Horizontal Resolution: 1700TVL</p> <p>Wide Dynamic Range: High/Middle/Low, 3 steps selection</p> <p>Dynamic Range: 69db@8xGain</p> <p>SNR(max): 37db</p> <p>DNR: High/Middle/Low, 3 steps selection</p> <p>White Balance: Auto</p> <p>Gain Control: High/Middle/Low, 3 steps selection</p> <p>Flicker Control: Off/50Hz/60Hz, 3 steps selection</p> <p>Electronic Shutter: Auto/Manual (1/30, 1/100, 1/500, 1/1000, 1/2000, 1/5000, 1/10000)</p> <p>IRIS Control: Auto</p> </div> <div data-bbox="121 952 734 1052"> <p>IR Illuminators</p> <p>Wavelength Range: 850nm</p> <p>Distance: 25M</p> <p>Day and Night: IR-Cut Filter Removable (ICR)</p> </div> <div data-bbox="121 1052 734 1422"> <p>Video</p> <p>Video Compression: H.264 (MPEG-4Part 10/AVC)/MJPEG,Dual codec</p> <p>Video framerate: 2560x1920@15fps/1920x1080@30fps</p> <p>Resolution: H.264 : 5M(2560x1920@15fps) 3M(2048x1536@15fps) 2M(1600x1200@15fps) 1080P(1920x1080@30fps) 720P(1280x720@30fps)</p> <p>MJPEG : 1.3M(1280x960@15fps) 1080P(1920x1080@15fps) 720P(1280x720@15fps)</p> <p>Bitrate control: CBR and VBR, 128kbps~10Mbps</p> <p>Multi-streams: Dual streaming, Multiple profiles 1920x1080 H.264@30fps/1280x720 H.264(Sub) @30fps/1920x1080 MJPEG@15fps 2560x1920 H.264@15fps/640x480 H.264(Sub) @15fps/1280x960 MJPEG@15fps</p> <p>Digital Zoom: 1/4X, 1/3X, 1/2X, 1X, 2X, 4X</p> <p>Image Rotation (PC side): Mirror, Flip, Rotate 180°</p> </div> <div data-bbox="121 1422 734 1579"> <p>Intelligent Video Analytics</p> <p>De-Noise/Motion Detection/Blind Detection/Privacy Mask Objet Detection/Tracking, Tripwire Detection, Regional Entrance Detection, Abnormal Speed Detection, Reverse Direction Detection, Appearing/Disappearing Detection, Abandon Object Detection, Object Removal Detection, Loitering Detection, Events Counting</p> </div> <div data-bbox="121 1579 734 1646"> <p>Panning/Tilting</p> <p>Number of the preset positions: 16</p> </div> <div data-bbox="121 1646 734 1733"> <p>Audio</p> <p>2 Way Audio: Audio microphone in, Audio Line-out</p> <p>Compression: AMR, G.711 @ 64kbps, G.726 @ 32kbps/ Configure bit rate</p> </div>	<div data-bbox="861 622 1482 784"> <p>Network</p> <p>Streaming Protocols: RTSP/RTP/UDP, RTSP/RTP/TCP, RTSP/RTP/HTTP tunneling, LAN Multicast, Multipart-JPEG</p> <p>Supported Protocols: IPv4, IPv6, HTTP, UDP, TCP, ICMP, IGMP, ARP, DHCP, NTP, SMTP, FTP, SAMBA, UPnP, PPPoE, DNS, DDNS, RTSP, RTP, RTCP, ONVIF</p> <p>Mobile Surveillance: iPhone, iPad, Android, BlackBerry</p> </div> <div data-bbox="861 784 1482 851"> <p>Storage</p> <p>External: 1x Micro SD Card (SDHC up to 32GB)</p> </div> <div data-bbox="861 851 1482 929"> <p>Processors and Memory</p> <p>CPU: ARM9 SOC 800MHz</p> <p>Flash and Memory: 32MB NOR flash, 512MB DDRIII</p> </div> <div data-bbox="861 929 1482 1019"> <p>I/O and Connectors</p> <p>Alarm I/O: 1xAlarm-in (2pin), 1xAlarm-out (3pin)</p> <p>LAN: 1xRJ-45 Ethernet connector</p> <p>Audio: 1xAudio Microphone-in, 1xAudio Line-out</p> </div> <div data-bbox="861 1019 1482 1120"> <p>Software Compatibility</p> <p>Browser: Internet Explorer 6.0 or above</p> <p>Application Software: VMS Application Software</p> <p>OS supported: Microsoft Windows 2000, XP, Vista, Windows 7</p> </div> <div data-bbox="861 1120 1482 1198"> <p>Open API</p> <p>CGI commands to control camera Media SDK to handle streaming</p> </div> <div data-bbox="861 1198 1482 1254"> <p>Factory Default</p> <p>Button</p> </div> <div data-bbox="861 1254 1482 1344"> <p>Power</p> <p>Power: DC 12V DC12V/ POE</p> <p>Power Consumption: IR On : 7.8W / IR Off : 4.8W</p> </div> <div data-bbox="861 1344 1482 1400"> <p>Demension</p> <p>91mm(Φ)x173mm(H)</p> </div> <div data-bbox="861 1400 1482 1456"> <p>Weight</p> <p>DC12V : 1016g / PoE : 1040g</p> </div> <div data-bbox="861 1456 1482 1556"> <p>Operating Environment</p> <p>Operating temperature: -10°C~ +50°C</p> <p>Storage temperature: -20°C~ +60°C</p> <p>Humidity: 0% ~ 95% non-condensing</p> </div> <div data-bbox="861 1556 1482 1612"> <p>Certification</p> <p>CE, FCC Class A, RoHS, IP40</p> </div> <div data-bbox="861 1612 1482 1680"> <p>Warranty</p> <p>24 months</p> </div>
---	--



Dimension Diagram

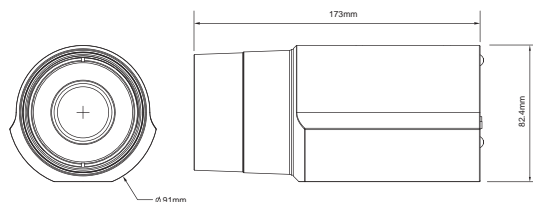

Distributed by:

3S PocketNet Technology Inc.

7F., No.5, Lane 16, Sec. 2, Sichuan Rd. Banqiao Dist.,
New Taipei City 22061, Taiwan (R.O.C.)
Tel: +886.2.8967.2909
Fax: +886.2.8967.2779